



# What wiring do you require?

**PURE**  
T H E A T R E


Connecting up a Pure Theatre home cinema could not be simpler. Just follow steps 1 to 3 below and your ready to go.

## STEP 1 : Mains Power...

In the ceiling void install the following:

1. Single mains socket to the right hand side of the screen.
2. Double mains socket to either side of the projector lift (projector & lift).


Note. Mains sockets are connected to fused spur(s).

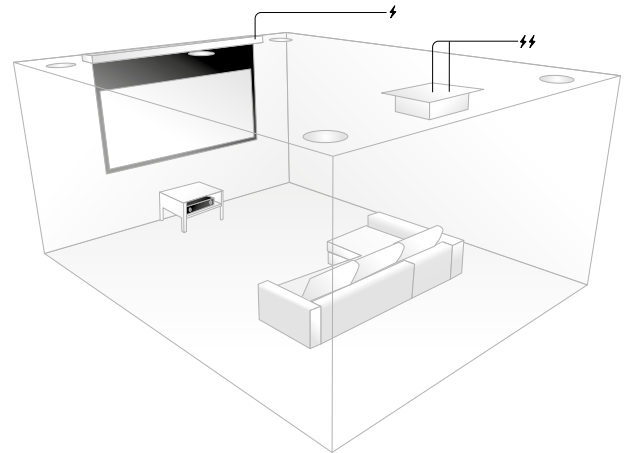

## STEP 2: HDMI Cable...

Connect a PREMIUM CERTIFIED HDMI Cable from your AV receiver to the projector.

HDMI Cables are available up to 30m long.

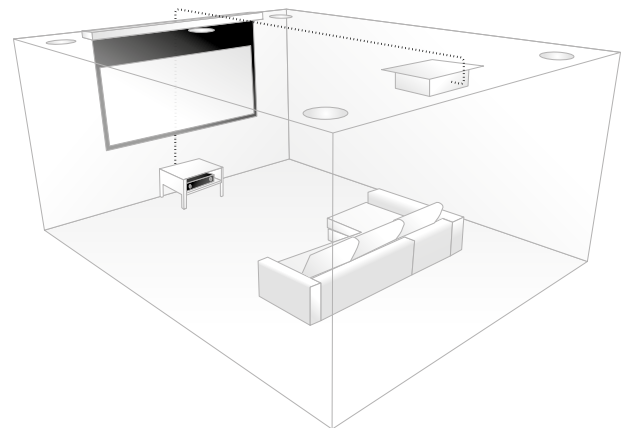

## STEP 3: 12v Trigger Cables...

12v Trigger cables connect your av receiver, screen, lift and projector so they all turn on/off together at the press of a button.

12v Trigger & RS232 cables are included but are optional and dont have to be used.

